

AFST SEPTIC TANK

APPLICATIONS

AFS Septic Tanks are ideally suited for use in on-site wastewater treatment systems where ground water infiltration is unacceptable.



SPECIFICATIONS

Tank Material:	Fiberglass Reinforced Polyester (FRP)
Tank Capacity:	1,000 or 1,500 gallon
Tank Configuration:	Single or Dual Compartment
Tank Testing:	All tanks are tested 100% watertight before shipment
Maximum Bury Depth:	48" above top of tank


FEATURES

- ◆ Orenco Systems® Inc. FRP Septic Tank
- ◆ AFS Ribbed Risers attach directly to the access openings eliminating the need for any adapters
- ◆ Inlet sanitary tee with Fernco coupler (installed)

OPTIONS

- ◆ AFS Ribbed Risers: 18" - 48"
- ◆ Single or Dual Compartment tanks
- ◆ 1000 or 1500 gallon tank capacity
- ◆ Orenco Systems® Inc. Biotube™ Effluent Filters (installed)


MODEL NUMBERS

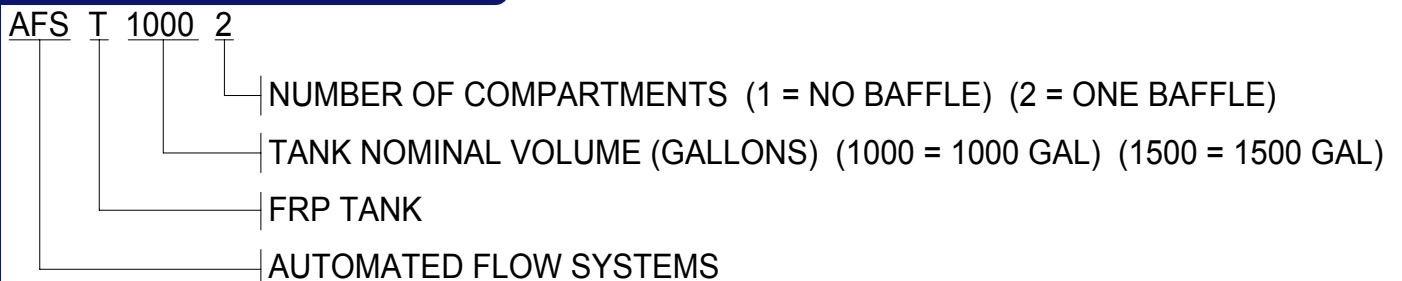

BOISE, ID
208.585.9338
208.585.9338 FAX

COEUR D'ALENE, ID
888.809.6778
208.664.2133
208.667.8775 FAX


SPOKANE, WA
800.359.9416
509.534.5616
509.535.6539 FAX

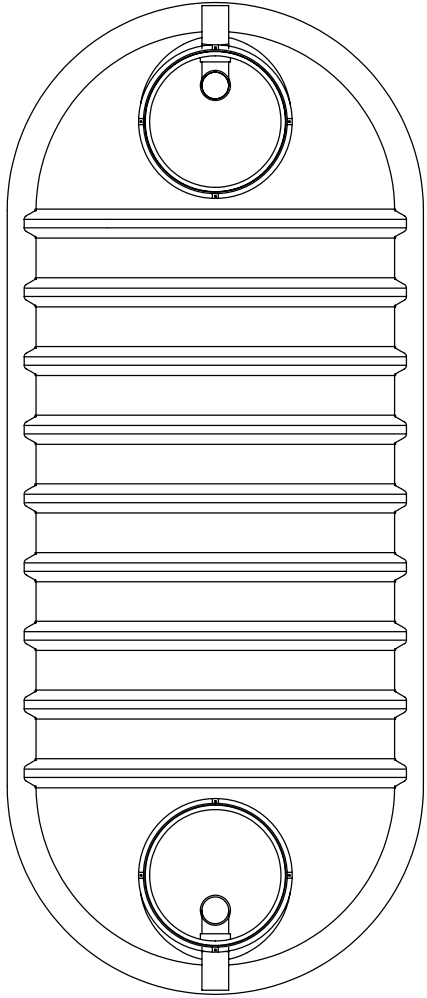


TOP VIEW

GENERAL NOTES

- ① ORENCO SYSTEMS[®] INC. SEPTIC TANK 1000 OR 1500 GAL FRP TESTED AND GUARANTEED WATERTIGHT
- ② FIBERGLASS TANK BAFFLE (OPTIONAL)
- ③ INLET/OUTLET SANITARY TEES
- ④ 24" ACCESS RISER AND FIBERGLASS LID (OPTIONAL)
- ⑤ MAXIMUM BURY DEPTH 48" ABOVE TOP OF TANK

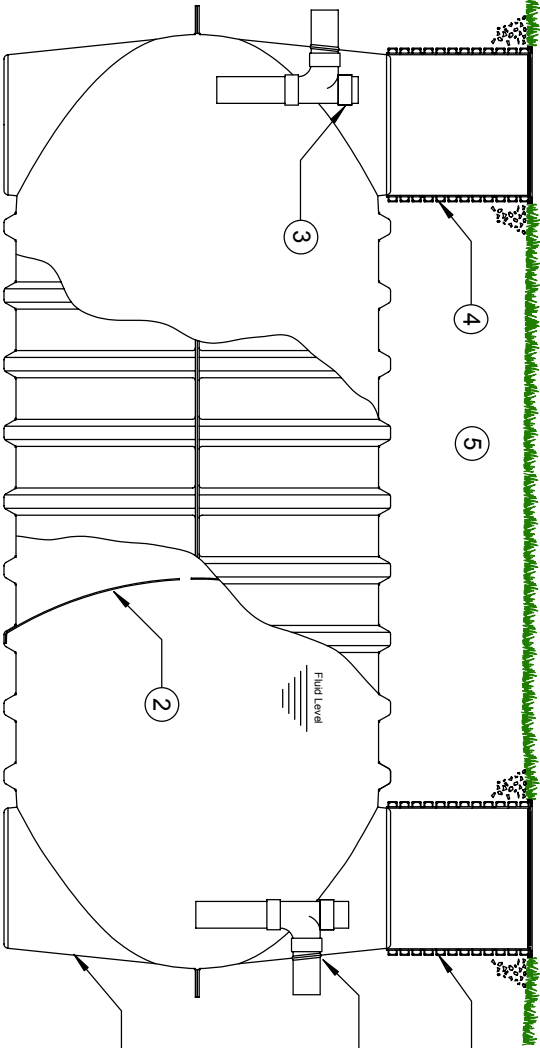

SIDE VIEW 1500 GALLON SEPTIC TANK

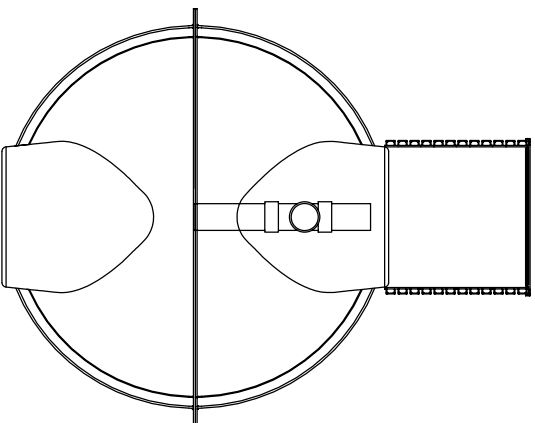

END VIEW



BOISE, ID
208-585-9338

COEUR D' ALENE, ID
888-809-6775
208-664-2133

SPOKANE, WA
800-359-9416
509-534-5616

DRAWN BY: KCW

SCALE: NTS

DATE: 06.13.05

VERSION NO. V1.0

AFST _____
FRP SEPTIC TANK